



DAFIBRE 155

Rectangular conductor of copper, covered with glassfibre yarn, class 155

Product name:

Dafibre 155 1

Dafibre 155 2

Dafibre 155 3

Specifications:

IEC 60317-32 or customer specification

UL approval:

Not approved

Class: 155

Temperature index $\geq 155^{\circ}\text{C}$ acc. to experience

Heat shock: $\geq 175^{\circ}\text{C}$

Insulation:

1-3 layers of glass-fibre yarn

Impregnation: Polyurethane

Properties:

- Excellent resistance to mechanical stress

Field of application:

- Dry-type transformers
- Electric motors
- Magnet coils
- Welding transformers

Standard packaging:

K500, VM630

Shelf life:


5 years, under normal ambient conditions

Conductor material

EN 1977 - ETP1 CW003 A

EN 1977 - ETP CW004A

ASTM B49 - ETP C11000/C11040

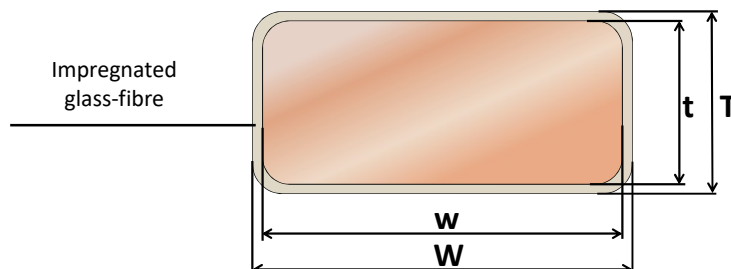

$T - t = \text{Increase in thickness}$

$W - w = \text{Increase in width}$

Conductor corner radius

Nominal thickness of conductor (mm)		Corner radius (mm)	Tolerance
Over	Up to and including		
-	1,00	0,5 nominal thickness	+/- 25%
1,00	1,60	0,50	+/- 25%
1,60	2,24	0,65	+/- 25%
2,24	3,55	0,80	+/- 25%
3,55	-	1,00	+/- 25%

Conductor tolerances

Nominal width or thickness of the conductor (mm)		Tolerance +/- (mm)
Over	Up to and including	
-	3,15	0,030
3,15	6,30	0,050
6,30	12,50	0,070
12,50	-	0,100

DAFIBRE 155

Rectangular conductor of copper, covered with glassfibre yarn, class 155

Insulation increase


Designation	Nominal width of conductor	Increase in thickness	Increase in width
Dafibre 155 1	$2,00 \leq w \leq 3,15$	$0,16 \pm 0,04$	max. 0,20
	$3,15 < w \leq 6,30$	$0,18 \pm 0,04$	max. 0,22
	$6,30 < w \leq 12,50$	$0,21 \pm 0,05$	max. 0,26
	$12,50 < w \leq 20,50$	$0,24 \pm 0,06$	max. 0,30
Dafibre 155 2	$2,00 \leq w \leq 3,15$	$0,27 \pm 0,06$	max. 0,33
	$3,15 < w \leq 6,30$	$0,30 \pm 0,07$	max. 0,37
	$6,30 < w \leq 12,50$	$0,35 \pm 0,08$	max. 0,43
	$12,50 < w \leq 20,50$	$0,39 \pm 0,08$	max. 0,47
Dafibre 155 3	$2,00 \leq w \leq 3,15$	$0,44 \pm 0,09$	max. 0,53
	$3,15 < w \leq 6,30$	$0,46 \pm 0,09$	max. 0,55
	$6,30 < w \leq 12,50$	$0,50 \pm 0,11$	max. 0,61
	$12,50 < w \leq 20,50$	$0,64 \pm 0,14$	max. 0,78

Properties for DAFIBRE 155

Main characteristics	Test method	Interval	Acceptance criteria
<u>Electrical properties</u>			
Conductor resistance	IEC 60851 - 5.3	1)	0,01724 Ωmm²/m
Conductivity	1/R	1)	> 58 m/(Ωmm²)
Breakdown voltage	IEC 60851 - 5.4	All sizes	350 V
- Dafibre 155 1			560 V
- Dafibre 155 2			750 V
- Dafibre 155 3			
<u>Mechanical properties</u>			
Elongation	IEC 60851-3.3	1,00 ≤ t ≤ 2,50	≥ 30%
		t > 2,50	≥ 32%
Springback angle	IEC 60851-3.4	All sizes	≤ 5,5°
Flexibility	IEC 60851-3.5	w ≤ 8 mm	10 x width
- Bending edgewise		w > 8 mm	15 x width
- Bending flatwise		All sizes	10 x thickness
Adherence	IEC 60851-3.5	All sizes	10 % stretch, no loss of adhesion
-Stretch			

1. Dependence of dimension is expressed by the unit

Dimension range

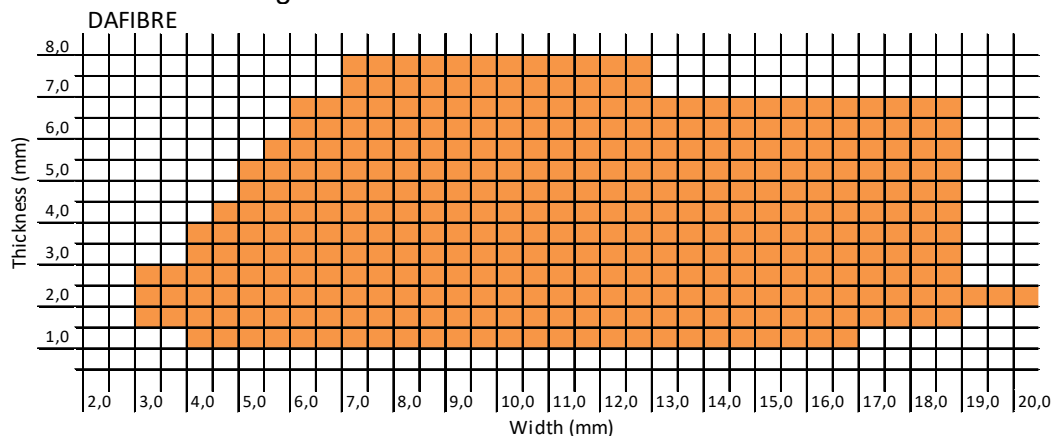

The technical data included is up to date at the time of printing.

LWW reserves the right to make any amendments deemed necessary

Fd. A(3)